


Quick Installation Guide


BM-1600 series

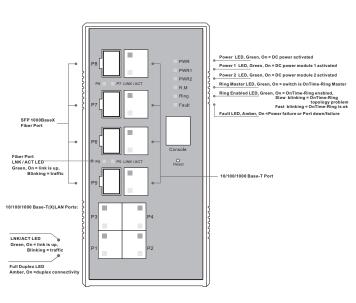

Interfaces	Description
10/100/1000BASE-T(X) RJ45 ports	10/100/1000Base-T(X) RJ-45 fast ports supporting: Auto-negotiation. Default Setting: Speed: auto Duplex: auto Flow control: disable
10/100/1000BASE-X	4 x 10/100/1000BASE-X combo ports
Fiber port	4 x 1000BASE-X SFP ports
Console port	Use the RJ-45-RS232 converter cable to manage the switch
Reset pin	Push reset button 2 to 3 seconds to reset the switch. Push reset button 5 second to reset the switch into Factory Default.
Terminal block (bottom)	Terminal block includes: PWR1, PWR2(12-48V DC) and Relay output (1A@24VDC)

Blueberry Industrial Managed Gigabit Ethernet Switches






■ Wall-mounted installation step


3. Mount the switch on the wall


■ DIN-Rail installation step



- Slant the switch and mount the metal spring to the DIN rail
- 2. Push the switch towards the DIN rail until a «click» sound can be heard

Dimensions







Packing list



® CD



QIG

Model name	Model Description	Accessories
BM-1600	Industrial 8-port Gigabit Managed Ethernet Switch with 4x10/100/1000T + 4xGiga combo ports	①X1, ②X8, ③X4, ④X2, ⑤X1, ⑥X1, ⑦X6, ⑥X1,

Copyright© 2010 OnTime Networks All rights reserved.

